

1064nm In-line Polarizer



Features

High Extinction Ratio
Low Insertion Loss
High Return Loss

Applications

Communication Systems
Test Instrumentations
Fiber Lasers
Sensors

Specifications


Parameters	Unit	Values
Center Wavelength	nm	1064
Operating Wavelength Range	nm	± 30
Typ. Insertion Loss at 23°C	dB	0.4
Max. Insertion Loss at 23°C	dB	0.6
Min. Return Loss	dB	50
Typ. Extinction Ratio at 23°C	dB	30
Min. Extinction Ratio at 23°C	dB	28
Max. Optical Power (CW)	mW	300
Max. Tensile Load	N	5
Operating Temperature	°C	-5 to +70
Storage Temperature	°C	-40 to +85

*Above specifications are for devices without connectors.

*For devices with connectors, IL will be 0.3dB higher, RL will be 5dB lower, and ER will be 2dB lower.

*The PM fiber and the connector key are aligned to the slow axis.

Package Dimensions

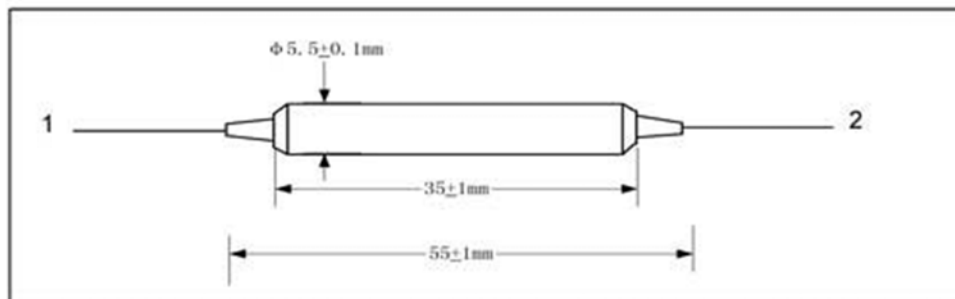

Ordering information

ILP-①①-②②-③③-④④-⑤

①①: Wavelength

06 - 1064nm

SS - Specify

②②: Connector Type on Port 1 & 2

1 - FC/UPC

2 - FC/APC

3 - SC/UPC

4 - SC/APC

N - None

S - Specify

③③: Fiber Jacket on Port 1 & Port 2

B - 250um Bare Fiber

L - 900um Loose Tube

S - Specify

④④: Fiber Type on Port 1 & 2

1 - PM 980 Panda Fiber

2 - HI 1060 Fiber

⑤: Fiber Length

0.8 - 0.8m

S - Specify